


UNLEASHED POWER OF LED

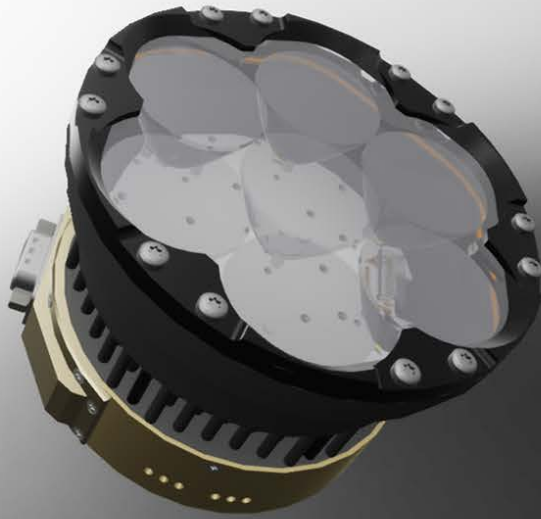

XEVISION® LED AND HID LIGHTING TECHNOLOGIES THE SUN IS OUR ONLY COMPETITOR

XETREME™ XV36-LED-7UN LANDING LIGHT

INPUT POWER: 100 WATT

LED OUTPUT POWER: 92 WATT

VOLTAGE: 9.5 VDC TO 32 VDC

BEAM PATTERN: CIRCULAR

BEAM ANGLE: 9°

LUMINOUS INTENSITY, CERTIFIED: 322'000 CD (CANDELA)

LUMINOUS FLUX, CERTIFIED: 10'870 LUMENS

RANGE AT 0.5 LUX: > 800 M (1/2 MILE)

3 COCKPIT SELECTABLE LIGHT PATTERNS, INCL. XESTROBE™

FORM FACTOR: PAR 36 TYPE LAMP

PROPRIETARY μ P-CONTROLLED ACTIVE COOLING DESIGN

REPAIRABILITY: ALL MODULES 100% & FUTURE-PROOF

WATER AND DUST INGRESS RATING: IP65

XETREME™ XV36-LED-7EL TAXI LIGHT

INPUT POWER: 100 WATT

LED OUTPUT POWER: 92 WATT

VOLTAGE: 9.5 VDC TO 32 VDC

BEAM PATTERN: RECTANGULAR-OVAL

BEAM ANGLE HORIZONTAL: 34°

BEAM ANGLE VERTICAL: 11°

LUMINOUS INTENSITY, CERTIFIED: 55'125 CD (CANDELA)

LUMINOUS FLUX, CERTIFIED: 8850 LUMENS

3 COCKPIT SELECTABLE LIGHT PATTERNS, INCL. XESTROBE™

FORM FACTOR: PAR 36 TYPE LAMP

PROPRIETARY μ P-CONTROLLED ACTIVE COOLING DESIGN

REPAIRABILITY: ALL LIGHT MODULES 100% & FUTURE-PROOF

WATER AND DUST INGRESS RATING: IP65